

TD1500



EPA Certified / Stationary Emergency

OUTPUT POWER OPTIONS					STANDBY RATING		sKVA
Make	Voltage	Alternator	Phase	Hertz	kW/kVA	Amps	30% Voltage Dip
Stamford	600	S7L1D-C4-07	3	60	1500/1875	1806	3800
	277/480	S7L1D-C4-312	3	60	1500/1875	2258	3250
	120/208	S7L1D-C4-312	3	60	1365/1706	4742	2525
	120/240	S7L1D-C4-312	3	60	1365/1706	4109	2525

**Engine Data**

Manufacturer	Perkins
Model	5012C-E46TAG6
Aspiration	Quad Turbocharged
EPA Tier	2
Charge Air Cooling System	Air-to-Air
Arrangement	Vertical Inline, 4-Cycle
Displacement: L (in. ³)	45.84 (2797.33)
Bore: mm (in.)	160.00 (6.30)
Stroke: mm (in.)	190.00 (7.48)
Compression Ratio	13.8:1
Gross BMEP: psi (kPa)	346.93 (2392)
Net Horsepower	2117.47
Rated RPM	1800
Governor	Isochronous

Engine Liquid Capacity

Oil System: qt. (L)	143.97 (136.25)
Cooling Capacity: gal (L)	61.55 (233.00)

Engine Electrical

Electric Volts: DC	24
Cold Cranking Amps	1100
Battery(s) Required	2

Fuel System

Fuel Injection Type	MEUI
Recommended Fuel	Low Sulfur Diesel

Air Requirements

Air Filter(s) Type	Dry
Combustion Air Flow: CFM (m ³ /min)	4357.83 (123.4)
Maximum Air Intake Restriction	
Clean: in. H ₂ O (kPa)	10.03 (2.50)
Dirty: in. H ₂ O (kPa)	15.25 (3.80)
Radiator Air Flow: CFM (m ³ /min)	74,160.80 (2100)

Exhaust System

Gas Temperature: °F (°C)	966.20 (519.00)
Gas Flow: CFM (m ³ /min)	10,996.99 (311.4)
Max Back Pressure: in. H ₂ O (kPa)	40.13 (10.00)
Exhaust Outlet Size: in. (mm)	10.00 (254.00)

Sound Level

Open Unit Without Exhaust: dBA 3.2 ft (1M)	114.0
--	-------

Filters and Quantity

Air Cleaner Quantity	4
Oil Filter(s) Quantity	6
Fuel Filter(s) Quantity	2

Fuel Consumption

At 100% of Power Rating: gal/hr (L/hr)	100.23 (379.41)
At 75% of Power Rating: gal/hr (L/hr)	75.87 (287.21)
At 50% of Power Rating: gal/hr (L/hr)	52.45 (198.53)
At 25% of Power Rating: gal/hr (L/hr)	24.01 (90.88)

GENERAL GUIDELINES FOR DERATION: Altitude: Derate 0.5% per 100m (328 ft.) Elevation above 1000m (3279 ft.) Temperature: Derate 1.0% per 10°C (18°F) temperature above 25°C (77°F)

RATINGS: All three-phase units are rated at 0.8 power factor. All single-phase units are rated at 1.0 power factor.

125° RATINGS: 125° apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Ratings are in accordance with ISO-3046/1, BS 5514, AS 2789, and DIN 6271. For limited running time and base load ratings consult the factory. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Alternator Data

Manufacturer	Stamford	
Type	PMG	
Insulation Class	NEMA H	
Temperature Rise	125°C Standby	
Hertz	60	
RPM	1800	
Amortisseur Windings	Full	
CFM Cooling Required	3454	
Voltage Regulator	MX341	MX322
Sensing	Single Phase	Three Phase
Voltage Regulation	1.0%	0.50%

Features


- BS EN 60034, BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100, and AS1359 complaint
- IP23 enclosure
- Dynamically balanced to exceed BS6861:Part 1 Grade 2.5 vibration standard
- Quality assurance to BS EN ISO 9001
- Self-ventilated and Drip proof construction
- Two-thirds pitch stator and skewed rotor
- Heavy duty bearings
- Fully guarded
- Overexcitation protection
- Under frequency protection
- Analog input
- Overvoltage protection
- Paralleling compatible

Control Panels




DeepSea 7310 MKII

Simultaneous Use of RS232 & RS485
Modbus RTU Support
Fully Configurable Using USB, RS232 & RS485
IP65 Rating
6 Programmable Inputs & 8 Outputs
UL & cUL Listed and CE Certified

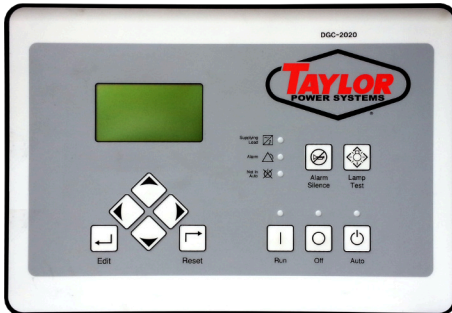

Basler DGC2020

SAE J1939 Engine ECU Communications
4 Programmable Inputs & 10 Outputs
Modbus Communications With RS485
UL Recognized, CSA & CE Certified
IP 54 Front Panel Rating
NFPA 110 Level 1 Compatible
Manual Override Keyswitch
DGC2020HD Variant Available

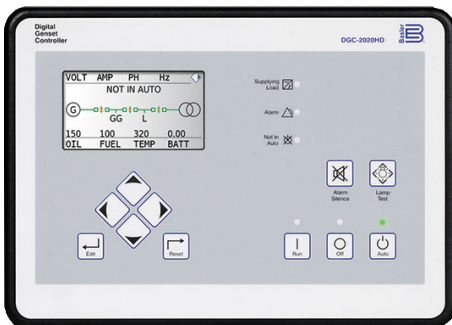

Basler DGC2020HD

SAE J1939 Engine ECU Communications
16 Programmable Inputs & 12 Outputs
Dual Copper Ethernet Ports (Fiber Optional)
Load Sharing of kW and kVAR over Ethernet
UL Recognized, CSA & CE Certified
IP 54 Front Panel Rating
NFPA 110 Level 1 Compatible
Optional Color Touch Screen
Manual Override Keyswitch



Standard Features:

Warranty

2 Year Standard

5 Year Comprehensive

Heavy Duty Steel Base

Vibration Isolators

Oil Drain Valve with Extension

Coolant Drain Kit

High Ambient Unit Mounted Radiator

Battery Charger

Block Heater

Factory Powder Coating

Factory Load Test

Owner's Manual

Controller Options

Fiber Optic Ethernet (DGC2020HD)

RS-232 Port & Generator Protection (DGC2020)

Flush or Surface Mount Remote Annunciator

Remote Mount Break Glass E-Stop Switch

Miscellaneous Options:

Generator Strip Heater

Spring Isolators

Line Circuit Breaker

Pad Type Battery Heater



Battery Heater Blanket

Oil Pan Heater

Open Unit

Options:



- Radiator Duct Flange
- Critical Silencer
- Sub-Base Fuel Tank

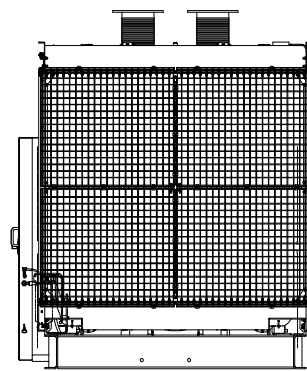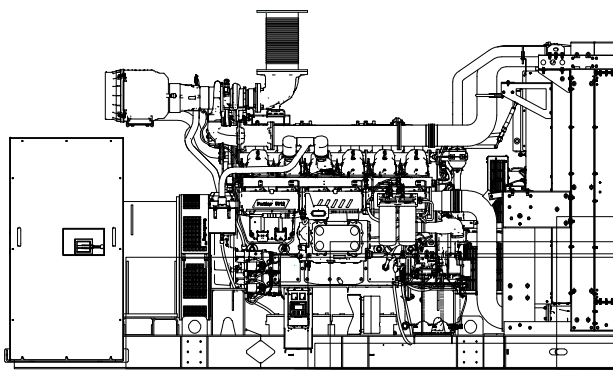

Standard Enclosed Unit

Options:

- Sound Attenuated Enclosure
- Load Center, Lights & GFI Receptacle
- Sub-Base Fuel Tank

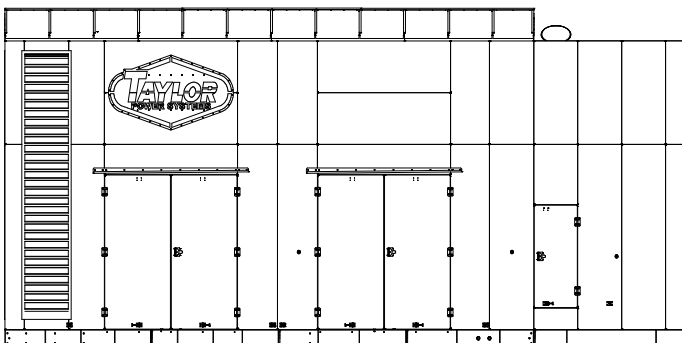

**Note: The above drawings are provided for reference only and should not be used for planning installation.
Contact your local distributor for more information.**