



EPA Certified / Stationary Emergency

| OUTPUT POWER OPTIONS | | | | | Natural Gas STANDBY RATING | LP Vapor STANDBY RATING | sKVA | | |
|----------------------|---------|-------------|-------|-------|-------------------------------|----------------------------|--------|------|-----------------|
| Make | Voltage | Alternator | Phase | Hertz | kW/kVA | Amps | kW/kVA | Amps | 30% Voltage Dip |
| Stamford | 600 | S1L2-J1-17 | 3 | 60 | 30/38 | 36 | 30/38 | 36 | 165 |
| | 277/480 | S1L2-K1-311 | 3 | 60 | 30/38 | 45 | 30/38 | 45 | 82 |
| | 120/208 | S1L2-K1-311 | 3 | 60 | 30/38 | 104 | 30/38 | 104 | 54 |
| | 120/240 | S1L2-K1-311 | 3 | 60 | 30/38 | 90 | 30/38 | 90 | 54 |
| | 120/240 | S1L2-K1-311 | 1 | 60 | 29/29 | 120 | 29/29 | 120 | 45 |
| | 120/240 | S1L2-H1-06 | 1 | 60 | 30/30 | 125 | 30/30 | 125 | 38 |
| Marathon | 600 | 283PSL5251 | 3 | 60 | 30/38 | 36 | 30/38 | 36 | 132 |
| | 277/480 | 283CSL1507 | 3 | 60 | 30/38 | 45 | 30/38 | 45 | 90 |
| | 120/208 | 283CSL1507 | 3 | 60 | 30/38 | 104 | 30/38 | 104 | 70 |
| | 120/240 | 283CSL1507 | 3 | 60 | 30/38 | 90 | 30/38 | 90 | 70 |
| | 120/240 | 283CSL1507 | 1 | 60 | 25/25 | 104 | 25/25 | 104 | 43 |
| | 120/240 | 283PSL1718 | 1 | 60 | 30/38 | 125 | 30/38 | 125 | 85 |
| Marathon | 277/480 | 283PSL1707 | 3 | 60 | 30/38 | 45 | 30/38 | 45 | 135 |
| | 120/208 | 283PSL1707 | 3 | 60 | 30/38 | 104 | 30/38 | 104 | 102 |
| | 120/240 | 283PSL1707 | 3 | 60 | 30/38 | 90 | 30/38 | 90 | 102 |
| | 120/240 | 283PSL1707 | 1 | 60 | 25/25 | 104 | 25/25 | 104 | 41 |



Engine Data

| | |
|-------------------------------------|--------------------------|
| Manufacturer | PSI |
| Model | 3.0L |
| Aspiration | Natural Aspiration |
| Arrangement | Vertical Inline, 4-Cycle |
| Firing Order | 1-3-4-2 |
| Displacement: L (in. ³) | 3.0 (181.0) |
| Bore: mm (in.) | 101.60 (4.00) |
| Stroke: mm (in.) | 91.4 (3.60) |
| Compression Ratio | 10.5:1 |
| Gross Horsepower: Natural Gas | 50.8 |
| LP Vapor | 51.5 |
| Rated RPM | 1800 |
| Governor | Isochronous |
| Speed Regulation | ±0.50% |

Engine Liquid Capacity

| | |
|---------------------------|-------------|
| Oil System: qt. (L) | 4.00 (3.78) |
| Cooling Capacity: gal (L) | 0.99 (3.78) |

Engine Electrical

| | |
|---------------------|-----|
| Electric Volts: DC | 12 |
| Cold Cranking Amps | 565 |
| Battery(s) Required | 1 |

Fuel System

| | |
|---|------------------|
| Fuel Supply Size: Natural Gas | 0.75" NPT |
| LP Vapor | 0.75" NPT |
| Supply Pressure: in. H ₂ O (kPa) | 7-11 (1.74-2.74) |

Air Requirements

| | |
|--|--------------|
| Air Filter(s) Type | Dry |
| Combustion Air Flow: CFM (m ³ /min) | 77.20 (2.19) |
| Maximum Air Intake Restriction | |
| Clean: in. H ₂ O (kPa) | 3.00 (1.49) |
| Dirty: in. H ₂ O (kPa) | 13.00 (3.24) |
| Radiator Air Flow: CFM (m ³ /min) | 5,000 (142) |

Exhaust System

| | |
|---|---------------|
| Gas Temperature: °F (°C) | 1270 (688) |
| Gas Flow: CFM (m ³ /min) | 249.40 (7.06) |
| Max Back Pressure: in. H ₂ O (kPa) | 40.9 (10.2) |
| Exhaust Outlet Size: in. (mm) | 2.5 (64.0) |

Filters and Quantity

| | |
|------------------------|---|
| Air Cleaner Quantity | 1 |
| Oil Filter(s) Quantity | 1 |

Fuel Consumption - Natural Gas

| | |
|---|------------|
| At 100% of Power Rating: CFH (m ³ /hr) | 430 (12.2) |
| At 75% of Power Rating: CFH (m ³ /hr) | 340 (9.6) |
| At 50% of Power Rating: CFH (m ³ /hr) | 255 (7.2) |
| At 25% of Power Rating: CFH (m ³ /hr) | 179 (5.1) |

Fuel Consumption - LP Vapor

| | |
|---|-----------|
| At 100% of Power Rating: CFH (m ³ /hr) | 175 (5.0) |
| At 75% of Power Rating: CFH (m ³ /hr) | 144 (4.1) |
| At 50% of Power Rating: CFH (m ³ /hr) | 108 (3.1) |
| At 25% of Power Rating: CFH (m ³ /hr) | 74 (2.1) |

GENERAL GUIDELINES FOR DERATION: Altitude: Derate 0.5% per 100m (328 ft.) Elevation above 1000m (3279 ft.) Temperature: Derate 1.0% per 10°C (18°F) temperature above 25°C (77°F)

RATINGS: All three-phase units are rated at 0.8 power factor. All single-phase units are rated at 1.0 power factor.

125° RATINGS: 125° apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Ratings are in accordance with ISO-3046/1, BS 5514, AS 2789, and DIN 6271. For limited running time and base load ratings consult the factory. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Alternator Data

| | |
|----------------------|---------------|
| Manufacturer | Stamford |
| Type | Self-Excited |
| Insulation Class | NEMA H |
| Temperature Rise | 125°C Standby |
| Hertz | 60 |
| RPM | 1800 |
| Amortisseur Windings | Full |
| CFM Cooling Required | 449 |
| Voltage Regulator | AS540 |
| Sensing | Single Phase |
| Voltage Regulation | 1.0% |

Features

- BS EN 60034, BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100, and AS1359 compliant
- IP23 enclosure
- Dynamically balanced to exceed BS6861:Part 1 Grade 2.5 vibration standard
- Quality assurance to BS EN ISO 9001
- Self-ventilated and drip proof construction
- Two-thirds pitch stator and skewed rotor
- Heavy duty bearings
- Fully guarded
- Overexcitation protection
- Under frequency protection
- Overload protection
- Paralleling compatible
- Single-phase sensing

Alternator Data

| | |
|----------------------|---------------|
| Manufacturer | Marathon |
| Type | Self-Excited |
| Insulation Class | NEMA N |
| Temperature Rise | 125°C Standby |
| Hertz | 60 |
| RPM | 1800 |
| Amortisseur Windings | Full |
| CFM Cooling Required | 340 |
| Voltage Regulator | SE350 |
| Sensing | Single Phase |
| Voltage Regulation | 1.0% |

Features


- NEMA MG1-32, BS5000, and IEC 34-1 compliant; CE & CSA Certified and UL Listed
- Self-ventilated and drip proof construction
- Two-thirds pitch stator and skewed rotor
- Wet wound, epoxied field windings
- Designed to withstand overspeeds of up to 125%
- Analog voltage regulator
- Easy access front-panel adjustments
- Under-frequency, stability and voltage adjustments
- Internal provisions for automatic voltage build up from generator residual voltage
- Electromagnetic interference filter

Control Panels



DeepSea 7310 MKII

Simultaneous Use of RS232 & RS485
 Modbus RTU Support
 Fully Configurable Using USB, RS232 & RS485
 IP65 Rating
 6 Programmable Inputs & 8 Outputs
 UL & cUL Listed and CE Certified

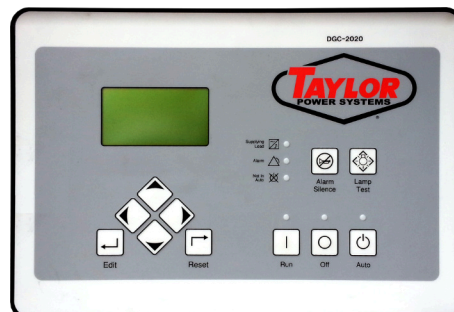

Basler DGC2020

SAE J1939 Engine ECU Communications
 4 Programmable Inputs & 10 Outputs
 Modbus Communications With RS485
 UL Recognized, CSA & CE Certified
 IP 54 Front Panel Rating
 NFPA 110 Level 1 Compatible
 Manual Override Keyswitch
 DGC2020HD Variant Available



Taylor Analog

Automatic CANBUS Engine Control
 Gauge Zeroing on Shutdown
 Auto-Off-Manual Control Switch
 Oil Pressure, Water Temperature, Battery Voltage and RPM Gauges
 AC Voltage, Frequency, Percent of Load, and Run-Time Metering
 LED Status Lights



Standard Features:

Warranty

| |
|----------------------|
| 2 Year Standard |
| 5 Year Comprehensive |

- | | |
|------------------------------------|------------------------|
| Heavy Duty Steel Base | Battery Charger |
| Vibration Isolators | Block Heater |
| Oil Drain Valve with Extension | Factory Powder Coating |
| Coolant Drain Kit | Factory Load Test |
| High Ambient Unit Mounted Radiator | Owner's Manual |

Controller Options

| |
|--|
| DGC2020HD Controller |
| Fiber Optic Ethernet (DGC2020HD) |
| RS-232 Port & Generator Protection (DGC2020) |
| Flush or Surface Mount Remote Annunciator |
| Remote Mount Break Glass E-Stop Switch |

Miscellaneous Options:

- | | |
|------------------------|-------------------------|
| Generator Strip Heater | Pad Type Battery Heater |
| Spring Isolators | Battery Heater Blanket |
| Line Circuit Breaker | Oil Pan Heater |


Open Unit

Options:

- Radiator Duct Flange
- Flex Exhaust
- Critical Silencer

Overall Size: 67"L x 36"W x 49"H
 Approximate Weight: xxxx lbs.

Note: Dimensions and weights reflect standard open unit with no options and are subject to change.

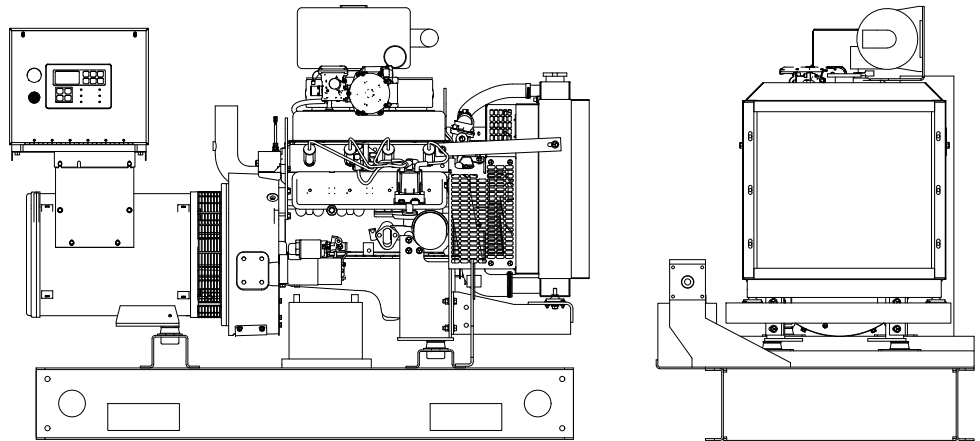


Standard Enclosed Unit

Options:

- Sound Attenuated Enclosure
- Load Center, Lights & GFI Receptacle

Overall Size: 78"L x 46"W x 46"H
 Approximate Weight: 1,500 lbs.

Note: Dimensions and weights reflect standard enclosed unit with no options and are subject to change.

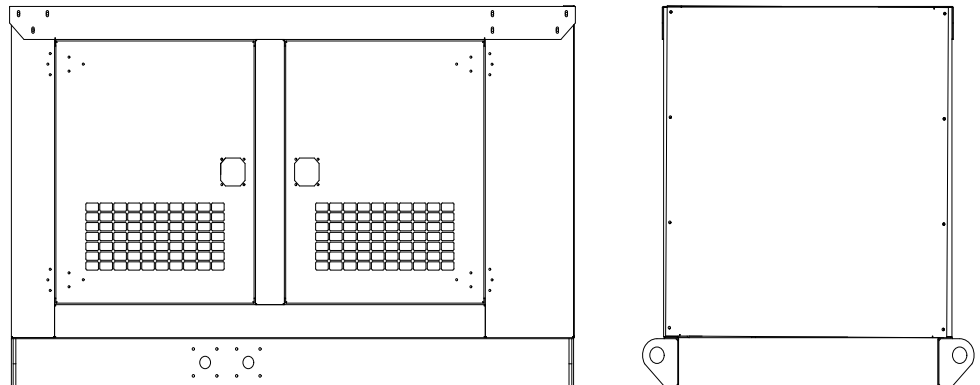

Note: The above drawings are provided for reference only and should not be used for planning installation. Contact your local distributor for more information.