

TGS40



CONFORMS TO UL STANDARD 2200
CERT. TO CSA STD. C22.2 NO.100

EPA Certified / Stationary Emergency

OUTPUT POWER OPTIONS					Natural Gas STANDBY RATING		LP Vapor STANDBY RATING		sKVA
Make	Voltage	Alternator	Phase	Hertz	kW/kVA	Amps	kW/kVA	Amps	30% Voltage Dip
Stamford	600	UCI224D17	3	60	40/50	48	40/50	48	195
	277/480	UCI224D311	3	60	40/50	60	40/50	60	182
	120/208	UCI224D311	3	60	40/50	139	40/50	139	136
	120/240	UCI224D311	3	60	40/50	120	40/50	120	136
	120/240	UCI224D311	1	60	40/40	167	40/40	167	96





Engine Data

Manufacturer	PSI
Model	4.3L
Aspiration	Natural Aspiration
Arrangement	V-6, 4-Cycle
Firing Order	1-6-5-4-3-2
Displacement: L (in. ³)	4.3 (262.0)
Bore: mm (in.)	101.60 (4.00)
Stroke: mm (in.)	88.0 (3.48)
Compression Ratio	9.5:1
Gross Horsepower: Natural Gas	66.45
LP Vapor	71.39
Rated RPM	1800
Governor	Isochronous
Speed Regulation	±0.50%

Engine Liquid Capacity

Oil System: qt. (L)	4.50 (4.25)
Cooling Capacity: gal (L)	1.92 (7.30)

Engine Electrical

Electric Volts: DC	12
Cold Cranking Amps	650
Battery(s) Required	1

Fuel System

Fuel Supply Size: Natural Gas	1.25" NPT
LP Vapor	1.25" NPT
Supply Pressure: in. H ₂ O (kPa)	7-11 (1.74-2.74)

Air Requirements

Air Filter(s) Type	Dry
Combustion Air Flow: CFM (m ³ /min)	112.10 (3.17)
Maximum Air Intake Restriction	
Clean: in. H ₂ O (kPa)	3.00 (1.49)
Dirty: in. H ₂ O (kPa)	13.00 (3.24)
Radiator Air Flow: CFM (m ³ /min)	5,000 (142)

Exhaust System

Gas Temperature: °F (°C)	1200 (649)
Gas Flow: CFM (m ³ /min)	361.9 (10.3)
Max Back Pressure: in. H ₂ O (kPa)	40.9 (10.2)
Exhaust Outlet Size: in. (mm)	3.0 (76.0)

Filters and Quantity

Air Cleaner Quantity	1
Oil Filter(s) Quantity	1

Fuel Consumption - Natural Gas

At 100% of Power Rating: CFH (m ³ /hr)	584 (16.5)
At 75% of Power Rating: CFH (m ³ /hr)	486 (13.8)
At 50% of Power Rating: CFH (m ³ /hr)	360 (10.2)
At 25% of Power Rating: CFH (m ³ /hr)	272 (7.7)

Fuel Consumption - LP Vapor

At 100% of Power Rating: CFH (m ³ /hr)	242 (6.9)
At 75% of Power Rating: CFH (m ³ /hr)	191 (5.4)
At 50% of Power Rating: CFH (m ³ /hr)	141 (4.0)
At 25% of Power Rating: CFH (m ³ /hr)	101 (2.9)

GENERAL GUIDELINES FOR DERATION: Altitude: Derate 0.5% per 100m (328 ft.) Elevation above 1000m (3279 ft.) Temperature: Derate 1.0% per 10°C (18°F) temperature above 25°C (77°F)

RATINGS: All three-phase units are rated at 0.8 power factor. All single-phase units are rated at 1.0 power factor.

125° RATINGS: 125° apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Ratings are in accordance with ISO-3046/1, BS 5514, AS 2789, and DIN 6271. For limited running time and base load ratings consult the factory. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Alternator Data

Manufacturer	Stamford
Type	PMG
Insulation Class	NEMA H
Temperature Rise	125°C Standby
Hertz	60
RPM	1800
Amortisseur Windings	Full
CFM Cooling Required	700
Voltage Regulator	MX341
Sensing	Single Phase
Voltage Regulation	1.0%

Features

- BS EN 60034, BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100, and AS1359 complaint
- IP23 enclosure
- Dynamically balanced to exceed BS6861:Part 1 Grade 2.5 vibration standard
- Quality assurance to BS EN ISO 9001
- Self-ventilated and Drip proof construction
- Two-thirds pitch stator and skewed rotor
- Heavy duty bearings
- Fully guarded
- Soft start circuitry
- Overexcitation protection
- Under frequency protection
- Analog input
- Overvoltage protection

DynaGen Tough Series TG410 Controller

- Meets NFPA-110 Level 1 (with RA400 Remote Annunciator)
- Oil pressure, engine temperature, fuel level, oil level, hour meter, RPM, real time clock, and battery voltage metering
- 3-Phase AC volts, amps & frequency metering
- J1939 DTC codes with custom text
- Modbus port with galvanic isolation to connect remote annunciators
- SAE J1939 CAN Bus Protocol
- Speed control offset adjustment for electronic engines
- Auto start on Low Battery and other inputs



Basler DGC2020ES Controller

- Meets NFPA-110 Level 1 (RDP-110C Remote Annunciator)
- Oil pressure, engine temperature, fuel level, oil level, hour meter, RPM, real time clock, and battery voltage metering
- Easy to Adjust Exercise Timer
- 3-Phase AC volts, amps & frequency metering
- Programmable Inputs & Outputs
- Fully potted design
- SAE J1939 CAN Bus Protocol
- Multilingual Capability


Standard Features:

- Heavy Duty Steel Base
- Vibration Isolators
- Battery Rack & Cables
- High Ambient Radiator
- Isochronous Governor
- Main Line Circuit Breaker
- NFPA-110 Level 1 Compliant

- Unit Mounted Emergency Stop
- Block Heater
- Battery Charger
- Factory Powder Coating
- Factory Load Test
- Owner's Manual
- Two Year Warranty

Optional Accessories:


- Breaker Shunt Trip & Auxiliary Contacts
- Flush or Surface Mount Remote Annunciator
- Remote Mount Break Glass E-Stop Switch
- Automatic Transfer Switch

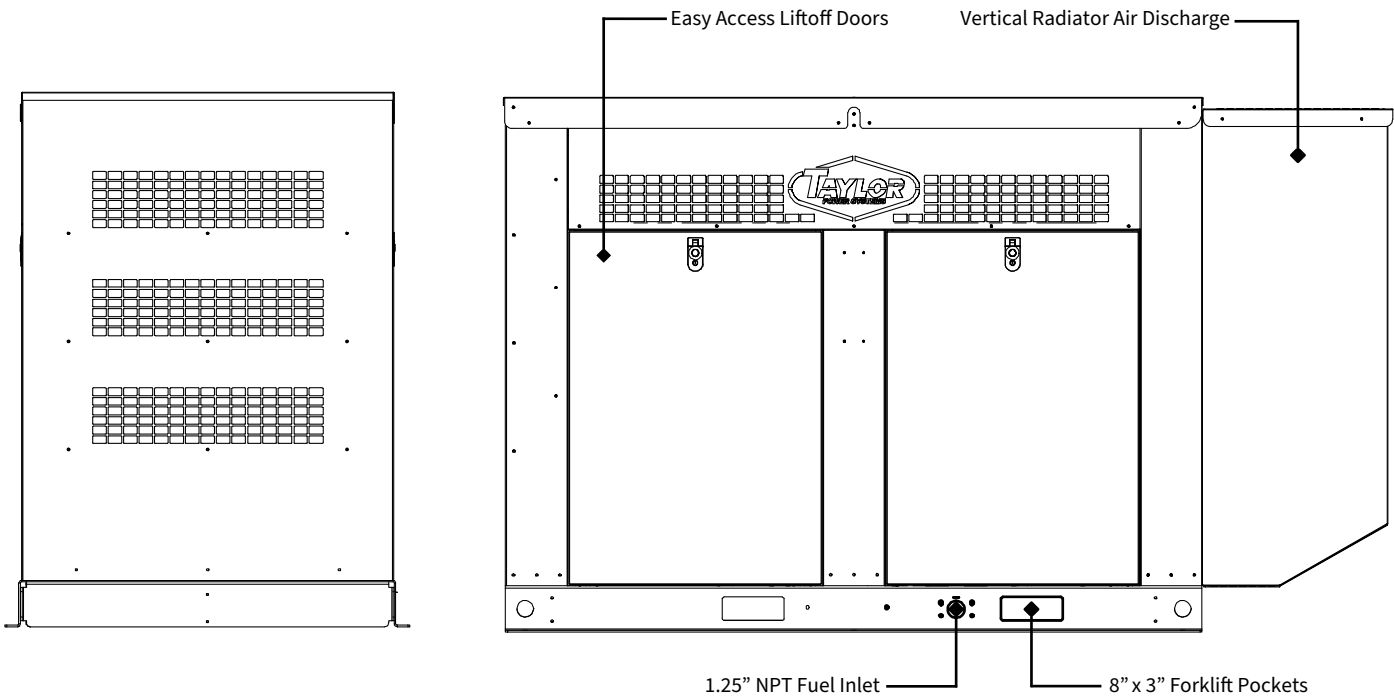

Sound Attenuated Enclosed Unit

Overall Size: 94"L x 46"W x 54"H
Approximate Weight: 2,200 lbs.

Note: Dimensions and weights reflect standard enclosed unit with no options and are subject to change.

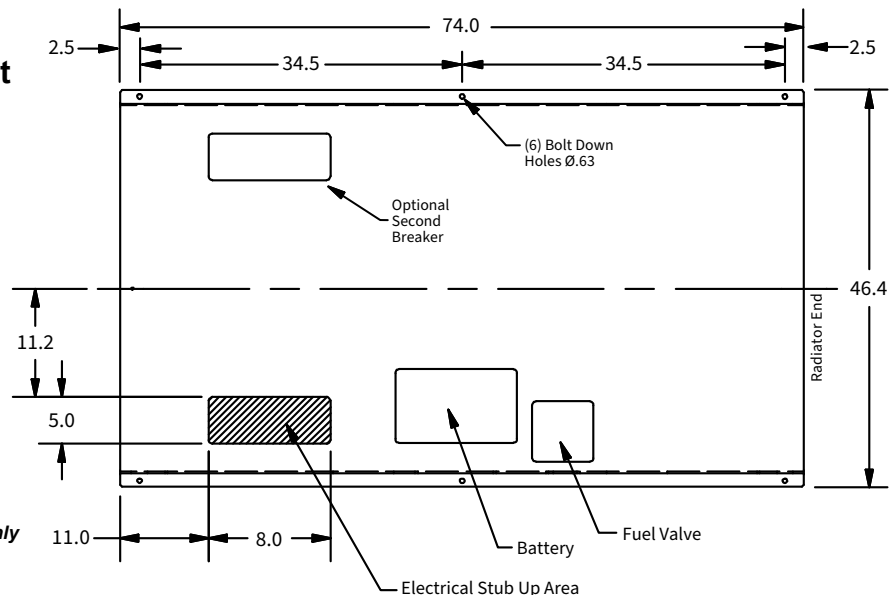

Note: The above drawings are provided for reference only and should not be used for planning installation. Contact your local distributor for more information.